Electrical Knockout &Hardware Mounting Diagrams

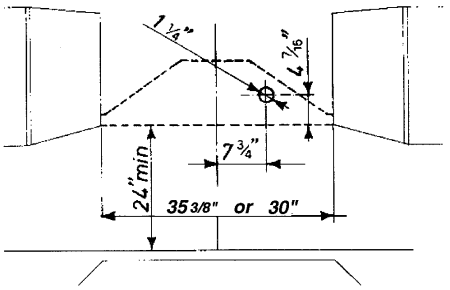

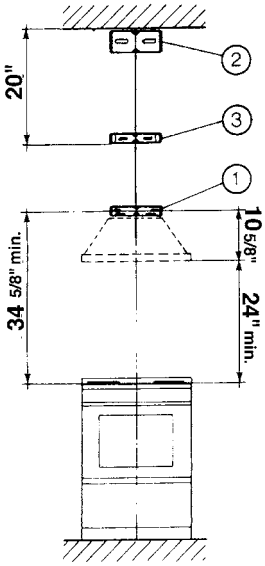

Dimensional Diagram

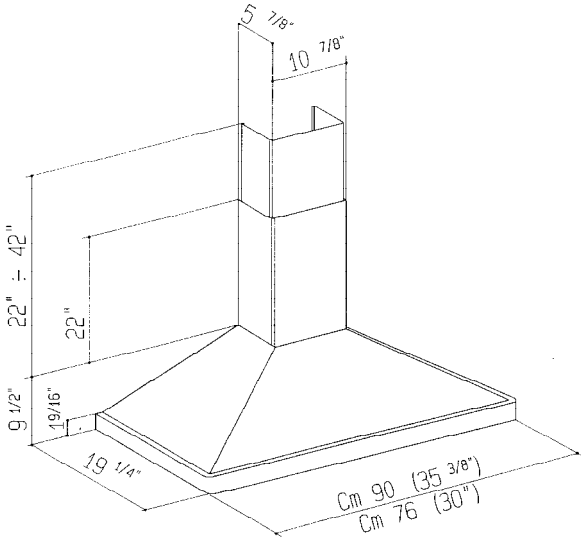

Pre-Planning Your Installation - Important: Consult the installation instructions before you begin installing this rangehood.

The Nova chimneys are adjustable and designed to meet varying ceiling heights. The chimneys can be adjusted for ceilings between 7' 8 1/2" and 9' 9 1/2" depending on the distance between the bottom of the hood and the cooktop **(distance x in diagram below)**.

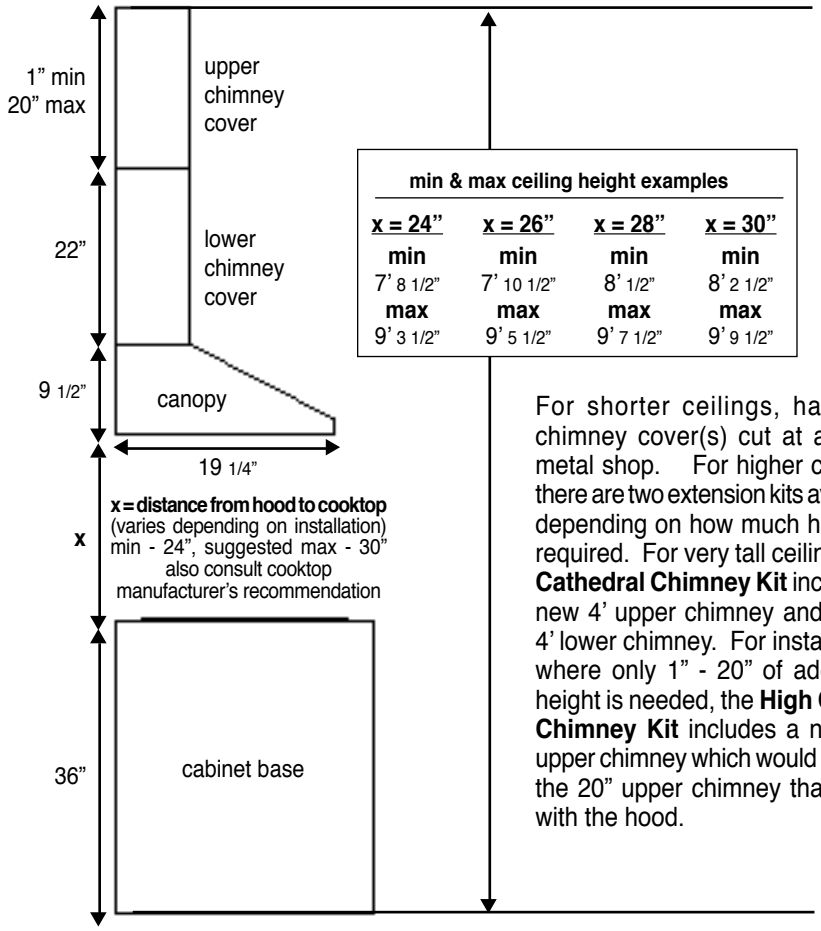

min & max ceiling height examples

x = 24"	x = 26"	x = 28"	x = 30"
min	**min**	**min**	**min**
7' 8 1/2"	7' 10 1/2"	8' 1/2"	8' 2 1/2"
max	**max**	**max**	**max**
9' 3 1/2"	9' 5 1/2"	9' 7 1/2"	9' 9 1/2"

For shorter ceilings, have the chimney cover(s) cut at a sheet metal shop. For higher ceilings, there are two extension kits available depending on how much height is required. For very tall ceilings, the **Cathedral Chimney Kit** includes a new 4' upper chimney and a new 4' lower chimney. For installations where only 1" - 20" of additional height is needed, the **High Ceiling Chimney Kit** includes a new 40" upper chimney which would replace the 20" upper chimney that came with the hood.

Pre-Planning Your Ductwork - Important: Consult the installation instructions before you begin installing this rangehood.

Make your ductrun as straight and short as possible. The ductrun should not exceed 35 equivalent feet if ducted with 3 1/4" by 10" rectangular duct. Count 45° angles as 3 feet, 90° elbows as 5 feet, and 90° flat elbows as 12 feet.

For best results, use no more than three 90° elbows. Make sure that there is a minimum of 24" of straight duct between elbows if more than one is used. Do not install two elbows together. If you must elbow right away, do it as far away from the hood's exhaust opening as possible.

Ductless Installations

For installations where ductwork is impossible or highly impractical, a **Ductless Conversion Kit** is available. Charcoal filters, which attach to the blower assembly, absorb smoke and odors. A ductless diverter directs the air out to a lower chimney with vent grates cut into the sides.



WARNING! Product specifications are subject to change without notification. Consult the installation instructions before you begin installing this rangehood.

Rev. 06/04